


CIRCUITRON EF-1
Emergency Flashers are designed to operate from any 8-12v. DC source. A 9 volt battery or CIRCUITRON's PS-3 regulator circuit are ideal. The RED and BLACK leads connect to the power source. RED is (+). The 2 LEDs (Light Emitting Diodes) connect in reverse parallel to the WHITE leads as shown below.



NOTE: LEDs in 3022 & 3023 kits may have their Cathodes (-) marked with a stripe on the lead or on the LED body.

The leads on the LEDs in Kit nos. 3022 & 3023 may be bent as shown to aid mounting.

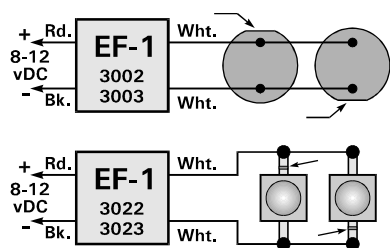

CAUTION: Do Not Use on Metal Vehicles unless Leads are Insulated.

211 RocBaar Dr.,
Romeoville, IL 60446
EMAIL: info@Circuitron.com